

## EBC SERIES AUTOMATIC 7 STAGE BATTERY CHARGER WITH LED



### Features: ■


- 7 stage battery charger ◀
- Two groups of charging output ◀
- Power ON/OFF switch ◀
- AC Input Voltage Range Selectable : 90~165V / 190~265V ◀
- Protections : short circuit, overload, over-temperature, reverse polarity (fuse) ◀
- Simple operations and maintenance ◀
- Slilent cooling fan operation ◀
- Automatic 7 stage charging: desulphation, soft start bulk, absorption, battery test, recondition and float ◀



### Plug Type (optional)



### ■ 7-STAGE CHARGING DIAGRAM

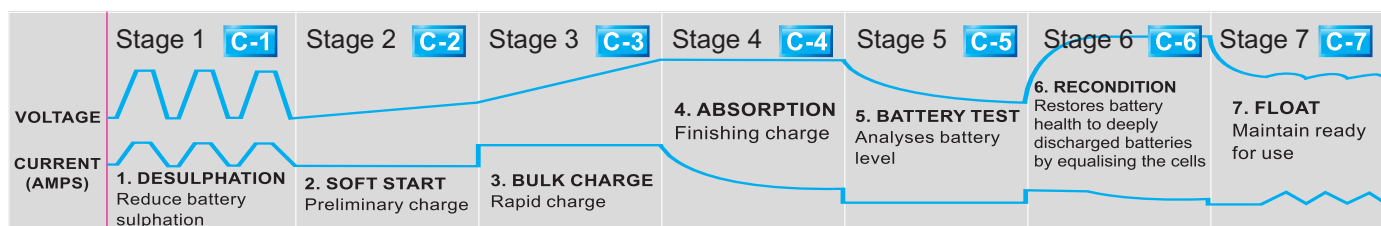

### ■ Specification:

Model	EBC1240	EBC2420	EBC1250	EBC2425	EBC1260	EBC2430
Input Voltage	AC220V(190-265V)					
Output Voltage	DC12V	DC24V	DC12V	DC24V	DC12V	DC24V
Max.charging current	40A	20A	50A	25A	60A	30A
Suggested Battery Capacity	266-400Ah	133-200Ah	333-500Ah	166-250Ah	400-600Ah	200-300Ah
Bulk/absorption Charging	14.2V/14.6V/14.8V DC selectable(12V)			28.4V/29.2V/29.6V DC selectable(24V)		
Floating Charging	13.2V/13.5V/13.8V DC selectable(12V)			26.4V/27.0V/27.6V DC selectable(24V)		
Protection Function	Reverse polarity, output short-circuit, over current,over voltage,overload, over heat					
Charging way	Automatic 7 stage charging: Desulphation, soft start, bulk,absorption, battery test, recondition and float					
LED display	(U-I-C-P)Battery voltage, output current, charge status,overheat protection					
Battery type	All rechargeable lead acid battery					
Operating Temperature	0-40℃					
Ventilation	Cooling fan;By thermal&current control					
DIMENSION	22.6*17.5*9.5cm (L*W*H)					
N.W/UNIT	2060g					
QTY/Ctn	6 pcs/box. 42.5*34.3*37.5cm					
G.W/Ctn	16.5kg					
Certification	CE.RoHS.SONCAP					